



MDV 2025 kainynas



Sieniniai oro kondicionieriai / šilumos siurbliai MDV Frost Nordic 2025 m. kainos


Drain pan heater



Compressor crankcase heater

NEW
A++


Modeliai	FR-09HRFN8-QRD1 MOX133-09HFN8-QRD1N	FR-12HRFN8-QRD1 MOX133-12HFN8-QRD1N	FR-18HRFN8-QRD0 MOX330-18HFN8-QRD0N	FR-24HRFN8-QRD0 MOX431-24HFN8-QRD0N
Galia, kW (šald./šild.)	2,60 (0,91~3,40) kW 2,93 (0,82~3,37) kW	3,50 (1,11~3,93) kW 3,81 (1,08~4,16) kW	5,30 (0,34~5,83) kW 5,60 (3,10~5,85) kW	7,00 (2,10~7,90) kW 7,30 (1,60~7,90) kW
Elektros sąnaudos, kW (šald./šild.)	0,80 kW / 0,93 kW	1,32 kW / 1,19 kW	1,55 kW / 1,57 kW	2,60 kW / 2,40 kW
Įtampa, V/Hz	~220-240 / 1 / 50	~220-240 / 50	~220-240 / 50	~220-240 / 50
SEER / SCOP	7,00 / 4,10	6,50 / 4,10	7,40 / 4,00	6,10 / 4,00
Energijos efektyvumo klasė šaldant/šildant	A++ / A+	A++ / A+	A++ / A+	A++ / A+
Triukšmo lygis dB (A) Vidinis blokas min.-max. / išorinis blokas	20,5-25-32-37 / 55	21,5-25-35,5-39,5 / 54,5	22-26-36-42,5 / 56	26-36-40,5-45 / 59
Oro srautas (vid.blokas min.-max.) (m3/val.)	259-333-435	310-430-530	540-678-840	660-816-978
Matmenys, mm (WxHxD) vid./išor.	805x285x194 / 720x495x270	805x285x194 / 720x495x270	957x302x213 / 805x554x330	1040x327x220 / 890x673x324
Vid.bloko svoris neto/bruto, kg	6,7 / 9,2	7,3 / 9,5	10 / 13	12,3 / 15,8
Išor.bloko svoris neto/bruto, kg	21,2 / 23,0	21,2 / 23,0	32,7 / 35,4	42,9 / 45,9
Vamzdynas	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"
Vamzdyno max ilgis/aukštis	25 / 10	25 / 10	30 / 20	50 / 25
Freono R32 kiekis, kg	0,47	0,52	1,08	1,42
El. maitinimas / laido storis	išorinis blokas 3x1,5mm ²	išorinis blokas 3x1,5mm ²	išorinis blokas 3x2,5mm ²	išorinis blokas 3x2,5mm ²
Valdymo laidas tarp bloku	5x1,5	5x1,5	5x1,5	5x1,5
Darbinės temperatūros ribos šaldymas/šildymas	-15 - +50 / -25 - +30	-15 - +50 / -25 - +30	-15 - +50 / -25 - +30	-15 - +50 / -25 - +30
Mažmeninė kaina EUR be PVM	450 €	460 €	780 €	1 050 €
Mažmeninė kaina EUR su PVM	545 €	557 €	944 €	1 271 €



WiFi control



Wireless remote controller (RG10A5(G)/BGEF)



TURBO function



Emergency operation mode



Sleep mode



ECO



Self-cleaning



High density filter



Compound filter (catalyst+carbon-ionising)



Horizontal louver control



Timer



Restoring the louver settings



5 steps of fan speed regulation



Intelligent modulation of the fan rotational speed



1W in standby mode



Refrigerant leakage detection



Manual switch



LED on/off



8°C heating (Frost Protect)



Hot start



Auto restart



"Follow me" function



Operation in low ambient temperatures



Split and multi compatible



Drain pan heater



Compressor crankcase heater



Quiet operation mode

Sieniniai oro kondicionieriai / šilumos siurbliai **MDV Aroma Nordic** 2025 m. kainos



Drain pan heater



Compressor crankcase heater



Modeliai	AFBU-09HRDN8-QRD0 MOX133-09HFN8-QRD0N	AFBU-12HRDNX-QRD0 MOX133-12HFN8-QRD0N	AFCU-18HRFN8-QRD0 MOX330-18HFN8-QRD0N	AFDU-24HRFN8-QRD0 MOX431-24HFN8-QRD0N
Galia, kW (šald./šild.)	2,60 (0,90~3,40) kW 2,90 (0,80~3,40) kW	3,50 (1,10~4,20) kW 3,80 (1,10~4,20) kW	5,30 (0,34~5,83) kW 5,60 (1,10~5,85) kW	7,00 (2,10~7,90) kW 7,30 (1,60~7,90) kW
Elektros sąnaudos, kW (šald./šild.)	0,73 kW / 0,73 kW	1,21 kW / 1,10 kW	1,55 kW / 1,57 kW	2,60 kW / 2,40 kW
Įtampa, V/Hz	~220-240 / 1 / 50	~220-240 / 50	~220-240 / 50	~220-240 / 50
SEER / SCOP	6,30 / 4,00	6,10 / 4,00	7,40 / 4,00	6,10 / 4,00
Energijos efektyvumo klasė šaldant/šildant	A++ / A+	A++ / A+	A++ / A+	A++ / A+
Triukšmo lygis dB (A) Vidinis blokas min.-max. / išorinis blokas	20-25-32-38,5 / 55,5	21-25-34,5-40,5 / 56	20-26-36-42,5 / 56	30-36-40,5-45 / 59
Oro srautas (vid.blokas min.-max.) (m3/min)	5,4-6,0-7,7	5,1-7,1-9,0	9,0-11,3-14,0	11,0-13,6-16,3
Matmenys, mm (WxHxD) vid./išor.	805x285x194 / 720x495x270	805x285x194 / 720x495x270	957x302x213 / 805x554x330	1040x327x220 / 890x673x324
Vid.bloko svoris neto/bruto, kg	7,6 / 9,8	7,6 / 9,8	10 / 13	12,3 / 15,8
Išor.bloko svoris neto/bruto, kg	23,2 / 25,0	23,2 / 25,0	32,7 / 35,4	42,9 / 45,9
Vamzdynas	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"
Vamzdyno max ilgis/aukštis	25 / 10	25 / 10	30 / 20	50 / 25
Freono R32 kiekis, kg	0,55	0,55	1,08	1,42
El. maitinimas / laido storis	išorinis blokas 3x1,5mm ²	išorinis blokas 3x1,5mm ²	išorinis blokas 3x2,5mm ²	išorinis blokas 3x2,5mm ²
Valdymo laidas tarp bloku	5x1,5	5x1,5	5x1,5	5x1,5
Darbinės temperatūros ribos šaldymas/šildymas*	-15 - +50 / -25 - +30	-15 - +50 / -25 - +30	-15 - +50 / -25 - +30	-15 - +50 / -25 - +30
Mažmeninė kaina EUR be PVM	520 €	550 €	850 €	1 150 €
Mažmeninė kaina EUR su PVM	629 €	666 €	1 029 €	1 392 €



WiFi control



Wireless remote controller (RG10A5(G)/BGEF)



TURBO function



Emergency operation mode



Sleep mode



ECO



Self-cleaning



High density filter



Compound filter (catalyst+carbon+ionising)



Horizontal louver control



Timer



Restoring the louver settings



5 steps of fan speed regulation



Intelligent modulation of the fan rotational speed



1W in standby mode



Refrigerant leakage detection



Manual switch



LED on/off



8°C heating (Frost Protect)



Ioniser



Hot start



Auto restart



"Follow me" function



Operation in low ambient temperatures



Split and multi compatible



Drain pan heater



Compressor crankcase heater



Quiet operation mode



Aromatic filter

Šilumos siurbLIAI MDV Blue XT -30C 2025 m. kainos



Drain pan heater



Compressor crankcase heater

NEW

A+++



Modeliai	XT-09HRFN8-QRD6 / MOXT230-09HFN8-QRD6	XT-12HRFN8-QRD6 / MOXT230-12HFN8-QRD6
Galia, kW (šald./šild.)	2,60 (1,23~3,30) kW 2,93 (0,84~3,72) kW	3,50 (1,32~4,31) kW 3,80 (0,88~4,40) kW
Elektros sąnaudos, kW (šald./šild.)	0,60 kW / 0,62 kW	0,90 kW / 0,95 kW
Įtampa, V/Hz	~220-240 / 1 / 50	~220-240 / 1 / 50
SEER / SCOP	8,80 / 4,60	8,50 / 4,60
Energijos efektyvumo klasė šaldant/šildant	A+++ / A++	A+++ / A++
Triukšmo lygis dB (A) Vidinis blokas min.-max. / išorinis blokas	18,4-21,5-32,5-40 / 53,5	18,4-21,5-32,5-40 / 53,5
Oro srautas (vid.blokas min.-max.) (m3/min)	7,1-8,6-11,7	7,1-8,6-11,7
Matmenys, mm (WxHxD) vid./išor.	895x298x248 / 805x554x330	895x298x248 / 805x554x330
Vid.bloko svoris neto/bruto, kg	11,3 / 14,16	11,3 / 14,16
Išor.bloko svoris neto/bruto, kg	26,4 / 28,8	26,4 / 28,8
Vamzdynas	1/4" - 3/8"	1/4" - 3/8"
Vamzdyno max ilgis/aukštis	25 / 10	25 / 10
Freono R32 kiekis, kg	0,7	0,7
El. maitinimas / laido storis	išorinis blokas 3x1,5mm ²	išorinis blokas 3x1,5mm ²
Valdymo laidas tarp bloku	5x1,5	5x1,5
Darbinės temperatūros ribos šaldymas/šildymas*	-15 - +50 / -30 - +24	-15 - +50 / -30 - +24
Mažmeninė kaina EUR be PVM	810 €	850 €
Mažmeninė kaina EUR su PVM	980 €	1 029 €



Rotary 180° deflector (Cascade Mode)



Vertical 0° air stream



Horizontal 0° air stream



Quiet mode - low noise level 18.4 dB(A)



8°C heating (Frost Protect)



"Follow me" function



Ion filter



High density net filter



Dry mode



Self-cleaning



Restoring the louver settings



Economy operation



1W in standby mode



Sleep mode



Compressor crankcase heater & Drain pan heater



Heating in low outdoor temp. -30°C



Auto restart



Refrigerant leakage detection



Outdoor unit cleaning



Prime Guard-GoldenFin anticorrosion coating





RG10X1(G2HS)/BGEF Wireless remote controller



Wi-Fi control

Šilumos siurbliai MDV Oasis -30C 2025 m. kainos

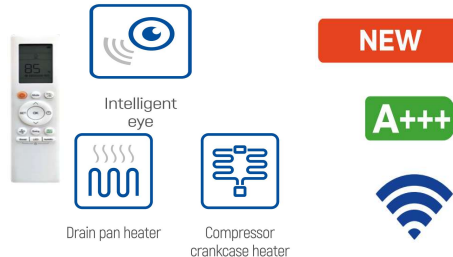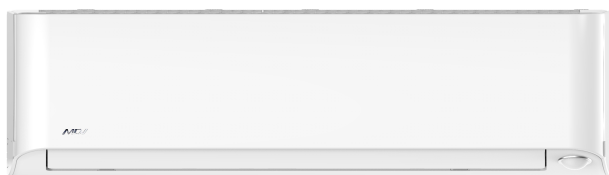

Modeliai	OP-09HRFN8-QRE3 / MOX330-09HRFN8-QRE3	OP-12HRFN8-QRE3 / MOX330-12HRFN8-QRE3
Galia, kW (šald./šild.)	2,60 (1,00~4,16) kW 4,10 (0,75~7,00) kW	3,50 (1,03~4,82) kW 4,30 (0,75~7,20) kW
Elektros sąnaudos, kW (šald./šild.)	0,48 kW / 0,83 kW	0,75 kW / 0,92 kW
Įtampa, V/Hz	~220-240 / 1 / 50	~220-240 / 1 / 50
SEER / SCOP	9,30 / 5,30	9,20 / 5,30
Energijos efektyvumo klasė šaldant/šildant	A+++ / A+++	A+++ / A+++
Triukšmo lygis dB (A) Vidinis blokas min.-max. / išorinis blokas	21-24-34-43 / 55,5	21-24-34-43 / 55,5
Oro srautas (vid.blokas min.-max.) (m3/min)	5,7-8,3-9,6-10,8	5,7-8,3-9,6-10,8
Matmenys, mm (WxHxD) vid./išor.	895x298x248 / 805x554x330	895x298x248 / 805x554x330
Vid.bloko svoris neto/bruto, kg	12,7 / 17,5	12,7 / 17,5
Išor.bloko svoris neto/bruto, kg	32,3 / 34,8	32,3 / 34,8
Vamzdynas	1/4" - 3/8"	1/4" - 3/8"
Vamzdyno max ilgis/aukštis	25 / 10	25 / 10
Freono R32 kiekis, kg	0,9	0,9
El. maitinimas / laido storis	išorinis blokas 3x1,5mm ²	išorinis blokas 3x1,5mm ²
Valdymo laidas tarp bloku	5x1,5	5x1,5
Darbinės temperatūros ribos šaldymas/šildymas*	-15 - +50 / -30 - +30	-15 - +50 / -30 - +30
Mažmeninė kaina EUR be PVM	970 €	1 020 €
Mažmeninė kaina EUR su PVM	1 174 €	1 234 €



Sieniniai vidiniai blokai FROST komplekte su valdymo pultu ir Wi-Fi

Modeliai	FR09HRFN8QRD1	FR12HRFN8QRD1	FR18HRFN8QRD0	FR24HRFN8QRD0
Galia, kW (šald./šild.)	2.6 / 2.9	3.5 / 3.8	5.3 / 5.6	7.0 / 7.3
Triukšmo lygis dB (A) min/maks.	20.5/25/32/37	21.5/25/35.5/39.5	22/26/36/42.5	26/36/40.5/45
Oro srautas (m3/min)	5.4/6.0/7.7	5.1/7.1/9.0	9.0/11.3/14.0	11.0/13.6/16.3
Matmenys, mm (WxHxD)	715x285x194	805x194x285	957x302x213	1040x327x220
Svoris, kg neto/bruto	6,7 / 9,2	7,3 / 9,5	10 / 13	12,3 / 15,8
Vamzdynas	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"
Valdymo laidas tarp bloku	5x1,5	5x1,5	5x1,5	5x1,5
El. maitinimas	išorinis	išorinis	išorinis	išorinis
Kaina EUR be PVM	130 €	146 €	250 €	270 €
Kaina EUR su PVM	157 €	177 €	303 €	327 €


Lubiniai kasetiniai vidiniai blokai komplekte su grotelėmis ir valdymo pultu

Modeliai	ZMCA-09N8-D1M	ZMCA-12N8-C1M	ZMCA-18N8-C1M	ZMCD-24N8-C1M
Galia, kW (šald./šild.)	2.5 / 3.0	3.5 / 4.1	5.3 / 5.4	7.0 / 7.6
Triukšmo lygis dB (A) min/max	25.5/33/36/41	25.5/33/36/41	29/35.5/39.5/43	27/39.5/42.5/45.5
Oro srautas (m3/val)	420/510/618	420/510/618	498/618/720	996/1140/1296
Matmenys, mm (WxHxD)	570x570x260	570x570x260	570x570x260	830x830x205
Grotelių matmen., mm (WxHxD)	647x647x50	647x647x50	647x647x50	950x950x55
Svoris, kg neto/bruto	16.3 / 20.4	16.3 / 20.4	16 / 20.6	21.6/25.4
Vamzdynas	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"
Valdymo laidas tarp bloku	3+1	3+1	3+1	3+1
El. maitinimas	išorinis	išorinis	išorinis	išorinis
Kaina EUR be PVM	455 €	495 €	593 €	687 €
Kaina EUR su PVM	551 €	599 €	718 €	831 €


Ortakiniai vidiniai blokai komplekte su valdymo pultu

Modeliai	DCTS-12R32IVT IN	DCTS-18R32IVT IN	DCTB-24R32IVT IN
Galia, kW (šald./šild.)	3.5 / 3.8	5.3 / 5.6	7.0 / 7.6
Triukšmo lygis dB (A) min-max	23/29/30.5/34.5	26/34/38/41	27/37/40/42
Oro srautas (m3/val)	300 / 480 / 600	515 / 706 / 911	585 / 1035 / 1229
Matmenys, mm (WxDxH)	700x450x200	880x674x210	1100x774x249
Svoris, kg neto/bruto	17.8/21.5	24.4/29.6	32.3/39.1
Vamzdynas	1/4" - 3/8"	1/4" - 1/2"	9/8" - 5/8"
Valdymo laidas tarp bloku	3+1	3+1	3+1
El. maitinimas	išorinis	išorinis	išorinis
Kaina EUR be PVM	534 €	608 €	682 €
Kaina EUR su PVM	646 €	736 €	825 €


Grindiniai/lubiniai vidiniai blokai komplekte su valdymo pultu

Modeliai	CLFS-18R32IVT IN	CLFS-24R32IVT IN
Galia, kW (šald./šild.)	5.3 / 5.6	7.0 / 7.6
Triukšmo lygis dB (A) min-max	24/36.5/41/53.5	32/43/46/49
Oro srautas (m3/val)	723/839/958	854/1023/1192
Matmenys, mm (WxDxH)	1068x675x235	1068x675x235
Svoris, kg neto/bruto	28 / 33.3	28 / 33.3
Vamzdynas	1/4" - 1/2"	3/8" - 5/8"
Valdymo laidas tarp bloku	3+1	3+1
El. maitinimas	išorinis	išorinis
Kaina EUR be PVM	542 €	559 €
Kaina EUR su PVM	656 €	676 €



Išoriniai bloškai

Modeliai	M20H-14HFN8-QAH	M20E-18HFN8-QAH	M30G-21HFN8-QAH	M30A-27HFN8-QAH	M40E-28HFN8-QAH	M40B-36HFN8-QAH	M50E-42HFN8-QAH
Galingumas, kW (šald./šild.)	4.1 / 4.4	5.3 / 5.6	6.2 / 6.5	7.9 / 8.2	8.2 / 8.8	10.6 / 10.8	12.3 / 12.3
Vidinių blokų kiekis	1~2	1~2	1~3	1~3	1~4	1~4	1~5
Vidutinis el. gal., kW (šald./šild.)	1.27 / 1.19	1.63 / 1.50	1.90 / 1.74	2.45 / 2.21	2.25 / 2.37	3.30 / 2.76	3.81 / 3.30
Maksimalus el. gal., kW	2,75	2,85	3,91	4,1	4,15	4,6	4,7
SEER / SCOP	6,10 / 4,00 A++ / A+	6,10 / 4,00 A++ / A+	6,10 / 4,00 A++ / A+	6,10 / 4,00 A++ / A+	6,80 / 4,00 A++ / A+	6,50 / 4,00 A++ / A+	6,60 / 4,00 A++ / A+
Triukšmo lygis dB (A) maks.	56	56	58	58	62	63	62
Oro srautas (m3/val)	2100	2202	3000	3000	3798	4002	3852
Matmenys, mm (WxDxH)	805x330x554	800x333x554	890x342x673	890x342x673	946x410x810	946x410x810	946x410x810
Svoris, kg neto/bruto	31.6 / 34.7	35.5 / 38.5	43.3 / 47.1	48.0 / 51.8	62.1 / 67.7	68.8 / 75.6	73.3 / 80.4
Valdymo laidas tarp bloku	4x1.5	4x1.5	4x1.5	4x1.5	4x1.5	4x1.5	4x1.5
El. maitinimas	3x2.5	3x2.5	3x2.5	3x2.5	3x4.0	3x4.0	3x4.0
Bendras maksimalus atstumas, m	40	40	60	60	80	80	80
Maksimalus atstumas iki 1 vidinio, m	25	25	30	30	35	35	35
Maksimalus aukščių skirtumas vidinis/išorinis, m	15	15	15	15	15	15	15
Maksimalus aukščių skirtumas vidinis/vidinis, m	10	10	10	10	10	10	10
Freono R32 kiekis, kg	1,1	1,3	1,5	1,85	2,1	2,1	2,9
Freono pajungimai	1/4-3/8 x2	1/4-3/8 x2	1/4-3/8 x3	1/4-3/8 x3	1/4-3/8 x3 1/4-1/2 x1	1/4-3/8 x3 1/4-1/2 x1	1/4-3/8 x4 1/4-1/2 x1
Darbinės temperatūros ribos šald. / šild.	-15 ~ +50 / -20 ~ +24	-15 ~ +50 / -20 ~ +24	-15 ~ +50 / -20 ~ +24	-15 ~ +50 / -20 ~ +24	-15 ~ +50 / -20 ~ +24	-15 ~ +50 / -20 ~ +24	-15 ~ +50 / -20 ~ +24
Kaina EUR be PVM	763 €	964 €	1 144 €	1 272 €	1 586 €	1 908 €	2 176 €
Kaina EUR su PVM	923 €	1 166 €	1 384 €	1 539 €	1 919 €	2 309 €	2 633 €



Available indoor units combinations

Cooling capacity 4.1 kW

M20H-14HFN8-QA	
1 UNIT	2 UNITS
9	9+9
12	9+12
18	

Cooling capacity 5.3 kW

M20E-18HFN8-QA	
1 UNIT	2 UNITS
9	9+9
12	9+12
18	12+12

Cooling capacity 6.2 kW

M30G-21HFN8-QA		
1 UNIT	2 UNITS	3 UNITS
9	9+9	9+9+9
12	9+12	
18	9+18	
	12+12	

Cooling capacity 7.9 kW

M30A-27HFN8-QA		
1 UNIT	2 UNITS	3 UNITS
9	9+9	9+9+9
12	9+12	9+9+12
18	9+18	9+12+12
	12+12	12+12+12
	12+18	

Cooling capacity 8.2 kW

M40E-28HFN8-QA			
1 UNIT	2 UNITS	3 UNITS	4 UNITS
9	9+9	9+9+9	9+9+9+9
12	9+12	9+9+12	
18	9+18	9+9+18	
24	9+24	9+12+12	
	12+12	12+12+12	
	12+18		
	12+24		
	18+18		

Cooling capacity 10.6 kW

M40B-36HFN8-QA			
1 UNIT	2 UNITS	3 UNITS	4 UNITS
9	9+9	9+9+9	9+9+9+9
12	9+12	9+9+12	9+9+9+12
18	9+18	9+9+18	9+9+9+18
24	9+24	9+9+24	9+9+12+12
	12+12	9+12+12	9+12+12+12
	12+18	9+12+18	12+12+12+12
	12+24	9+12+24	
	18+18	9+18+18	
		12+12+12	
		12+12+18	

Cooling capacity 12.3 kW

M50E-42HFN8-QA				
1 UNIT	2 UNITS	3 UNITS	4 UNITS	5 UNITS
9	9+9	9+9+9	9+9+9+9	9+9+9+9+9
12	9+12	9+9+12	9+9+9+12	9+9+9+9+12
18	9+18	9+9+18	9+9+9+18	9+9+9+9+18
24	9+24	9+9+24	9+9+9+24	9+9+9+12+12
	12+12	9+12+12	9+9+12+12	9+9+12+12+12
	12+18	9+12+18	9+9+12+18	
	12+24	9+12+24	9+9+12+24	
	18+18	9+18+18	9+12+12+12	
		12+12+12	9+12+12+18	
		12+12+18	12+12+12+12	
		12+12+24	12+12+12+18	
		12+18+18		

Lubiniai/kasetiniai oro kondicionieriai MDV Compact Cassette 2025 m. kainos



Modeliai	CSTS4-09R32IVT-IN T-MBQ4-03B UNVS-09R32INT-OU	CSTS4-12R32IVT-IN T-MBQ4-03B UNVS-12R32INT OU	CSTS4-18R32IVT-IN T-MBQ4-03B UNVS-18R32INT OU
Galia, kW (šald./šild.)	2,60 (0,36~3,40) kW 2,93 (0,45~3,61) kW	3,50 (0,85~4,11) kW 3,81 (0,47~4,31) kW	5,30 (2,90~5,59) kW 5,57 (2,37~6,10) kW
Elektros sąnaudos, kW (šald./šild.)	0,81 kW / 0,95 kW	1,01 kW / 1,01 kW	1,63 kW / 1,54 kW
Įtampa, V/Hz	~220-240 / 1 / 50	~220-240 / 1 / 50	~220-240 / 1 / 50
SEER / SCOP	6,3 / 4,1	6,6 / 4,1	6,3 / 4,0
Energijos efektyvumo klasė šaldant/šildant	A++ / A+	A++ / A+	A++ / A+
Triukšmo lygis dB (A) Vidinis blokas min.-max. / išorinis blokas	26-33-35,5-37 / 53,5	25,5-31,5-38,5-42 / 57	25-31,5-41-44 / 58
Oro srautas (vid.blokas min.-max.) (m3/val)	500-460-400	620-520-330	660-540-300
Matmenys, mm (WxHxD) vid./išor.	570x570x260 / 647x647x50 /	570x570x260 / 647x647x50 /	570x570x260 / 647x647x50 /
Vid.bloko svoris neto/bruto, kg	14,6 / 17,5	16,3 / 20,4	16,3 / 20,4
Išor.bloko svoris neto/bruto, kg	24,6 / 27	26,6 / 29	32,5 / 35,2
Vamzdynas	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
Vamzdyno max ilgis/aukštis	25 / 10	25 / 10	30 / 20
Freono R32 kiekis, kg	0,65	0,71	1,15
El. maitinimas / laido storis	išorinis blokas 3x1,5mm ²	išorinis blokas 3x1,5mm ²	išorinis blokas 3x1,5mm ²
Valdymo laidas tarp bloku	4x1,0	4x1,0	4x1,0
Darbinės temperatūros ribos šaldymas/šildymas*	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24
Mažmeninė kaina EUR be PVM	1 017 €	1 311 €	1 613 €
Mažmeninė kaina EUR su PVM	1 231 €	1 586 €	1 952 €

STANDARD

Available with wireless remote controller RG51A[2]/E



Wireless remote controller (RG51A[2]/E)



High density filter



Alarm port



Remote switch



Fireproof electric control box



Self-cleaning



Timer



Auto Swing



Switching the airflow direction by 6°



LED on/off



Drain pump



Fresh air



TURBO function



Refrigerant leakage detection



Sleep mode



Economy operation



Short cut function



8°C heating



Operation in low ambient temperatures

OPTIONAL



WiFi control



Wired remote controller




Central controller

Lubiniai/kasetiniai oro kondicionieriai MDV Breezless Slim Cassette (vienfazė) 2025 m. kainos


Modeliai	CSTB-24R32IVT IN T-MBQ4-04A1 UNVS-24R32INT OU	CSTB-36R32IVT IN T-MBQ4-04A1 UNVS-36R32INTS OU	CSTB-42R32IVT IN T-MBQ4-04A1 UNVS-42R32INTS OU
Galia, kW (šald./šild.)	7,03 (3,30~7,91) kW 7,62 (2,81~8,94) kW	10,55 (2,70~11,43) kW 11,40 (2,78~12,66) kW	12,00 (2,93~12,31) kW 13,48 (3,37~14,07) kW
Elektros sąnaudos, kW (šald./šild.)	2,32 kW / 1,90 kW	3,95 kW / 3,00 kW	4,20 kW / 3,70 kW
Įtampa, V/Hz	~220-240 / 1 / 50	~220-240 / 1 / 50	~220-240 / 1 / 50
EER / COP	3,03 / 4,01	2,67 / 3,71	2,86 / 3,64
Energijos efektyvumo klasė šaldant/šildant	A++ / A++	A++ / A++	A++ / A++
Triukšmo lygis dB (A) Vidinis blokas min.-max. / išorinis blokas	27-39,5-42,5-45,5 / 60	39-44,5-47,5-50 / 63	38-46-48,5-51 / 63
Oro srautas (vid.blokas min.-max.) (m3/min)	16,6-19-21,6	23-25,8-28,3	26,7-29,2-31,7
Matmenys, mm (WxHxD) vid./išor.	830x830x205 / 950x950x55 / 890x342x673	830x830x205 / 950x950x55 / 946x410x810	830x830x287 / 950x950x55 / 946x410x810
Vid.bloko svoris neto/bruto, kg	21,6 / 25,4	27,2 / 31,2	29,3 / 33,5
Išor.bloko svoris neto/bruto, kg	43,9 / 46,9	66,9 / 71,5	71 / 75
Vamzdynas	3/8" - 5/8"	3/8" - 5/8"	3/8" - 5/8"
Vamzdyno max ilgis/aukštis	50 / 25	75 / 30	75 / 30
Freono R32 kiekis, kg	1,50	2,40	2,80
El. maitinimas / laido storis	išorinis blokas 3x2,5mm ²	išorinis blokas 3x4,0mm ²	išorinis blokas 3x4,0mm ²
Valdymo laidas tarp bloku	4x1,0	4x1,0	4x1,0
Darbinės temperatūros ribos šaldymas/šildymas*	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24
Mažmeninė kaina EUR be PVM	1 946 €	2 709 €	2 921 €
Mažmeninė kaina EUR su PVM	2 355 €	3 278 €	3 534 €

STANDARD

Available with wireless remote controller RG51A(2)/E

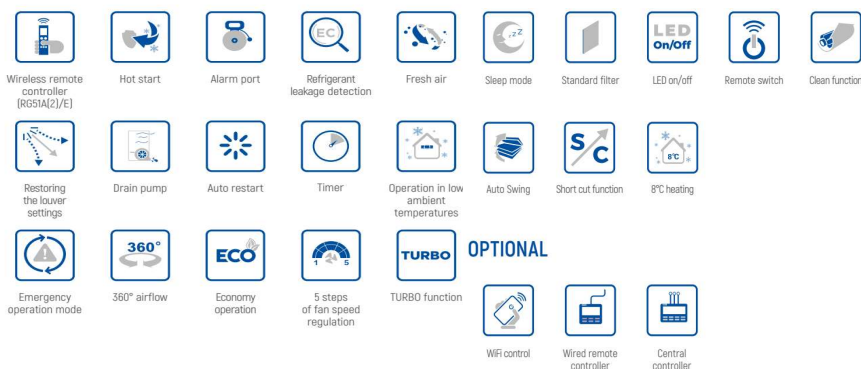



























Lubiniai/kasetiniai oro kondicionieriai **MDV Breezless Slim Cassette** (trifazė) 2025 m. kainos



Modeliai	CSTB-36R32IVT IN T-MBQ4-04A1 UNVS-36R32INTT OU	CSTB-42R32IVT IN T-MBQ4-04A1 UNVS-42R32INTT OU	CSTB-48R32IVT IN T-MBQ4-04A1 UNVS-48R32INT OU	CSTB-55R32IVT IN T-MBQ4-04A1 UNVS-55R32INT OU
Galia, kW (šald./šild.)	10,55 (2,70~11,43) kW 11,40 (2,78~12,66) kW	12,00 (2,93~12,31) kW 13,48 (3,37~14,07) kW	14,10 (3,52~15,83) kW 16,10 (4,10~17,29) kW	15,20 (4,10~16,71) kW 18,17 (4,40~19,93) kW
Elektros sąnaudos, kW (šald./šild.)	4,00 kW / 3,00 kW	4,30 kW / 3,70 kW	4,30 kW / 3,70 kW	5,00 kW / 5,55 kW
Įtampa, V/Hz	~380-415 / 3 / 50	~380-415 / 3 / 50	~380-415 / 3 / 50	~380-415 / 3 / 50
EER / COP	2,64 / 3,71	2,79 / 3,64	3,03 / 3,52	3,05 / 3,27
Energijos efektyvumo klasė šaldant/šildant	A++ / A++	A++ / A++	A++ / A++	A++ / A++
Triukšmo lygis dB (A) Vidinis blokas min.-max. / išorinis blokas	39-44,5-47,5-50 / 63	38-46-48,5-51 / 63	37,5-46,5-48,65-51 / 64	40-48-50,5-53 / 64
Oro srautas (vid.blokas min.-max.) (m3/min)	23-25,8-28,3	26,7-29,2-31,7	26,3-29,6-32,8	27,5-30,8-33,3
Matmenys, mm (WxHxD) vid./išor.	830x830x205 / 950x950x55 /	830x830x287 / 950x950x55 /	830x830x287 / 950x950x55 /	830x830x287 / 950x950x55 /
Vid.bloko svoris neto/bruto, kg	27,2 / 31,2	29,3 / 33,5	29,3 / 33,5	29,3 / 33,5
Išor.bloko svoris neto/bruto, kg	80,5 / 85	80,5 / 85	103,7 / 118,3	107 / 121,2
Vamzdynas	3/8" - 5/8"	3/8" - 5/8"	3/8" - 5/8"	3/8" - 5/8"
Vamzdyno max ilgis/aukštis	75 / 30	75 / 30	75 / 30	75 / 30
Freono R32 kiekis, kg	2,40	2,80	2,90	3,00
El. maitinimas / laido storis	išorinis blokas 5x2,5mm ²	išorinis blokas 5x2,5mm ²	išorinis blokas 5x2,5mm ²	išorinis blokas 5x2,5mm ²
Valdymo laidas tarp bloku	4x1,0	4x1,0	4x1,0	4x1,0
Darbinės temperatūros ribos šaldymas/šildymas*	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24
Mažmeninė kaina EUR be PVM	2 842 €	2 921 €	3 319 €	3 616 €
Mažmeninė kaina EUR su PVM	3 439 €	3 534 €	4 016 €	4 375 €

STANDARD

Available with wireless remote controller RG51A(2)/E

 Wireless remote controller (RG51A(2)/E)	 Hot start	 Alarm port	 Refrigerant leakage detection	 Fresh air	 Sleep mode	 Standard filter	 LED on/off	 Remote switch	 Clean function
 Restoring the louver settings	 Drain pump	 Auto restart	 Timer	 Operation in low ambient temperatures	 Auto Swing	 Short cut function	 8°C heating		
 Emergency operation mode	 360° airflow	 Economy operation	 5 steps of fan speed regulation	 TURBO function	OPTIONAL	 WiFi control	 Wired remote controller	 Central controller	

Ortakiniai oro kondicionieriai MDV (vienfaziai) 2025 m. kainos



Modeliai	DCTS-12R32IVT IN UNVS-12R32INT OU	DCTS-18R32IVT IN UNVS-18R32INT OU	DCTB-24R32IVT IN UNVS-24R32INT OU	DCTB-36R32IVT IN UNVS-36R32INTS OU
Galia, kW (šald./šild.)	3,52 (0,53~3,99) kW 3,81 (1,00~4,39) kW	5,28 (2,55~5,86) kW 5,60 (2,20~6,15) kW	7,03 (3,28~8,16) kW 7,62 (2,81~8,49) kW	10,55 (2,75~11,14) kW 11,72 (2,78~12,78) kW
Elektros sąnaudos, kW (šald./šild.)	1,05 kW / 1,04 kW	1,45 kW / 1,50 kW	2,32 kW / 1,90 kW	3,95 kW / 3,25 kW
Įtampa, V/Hz	~220-240 / 1 / 50	~220-240 / 1 / 50	~220-240 / 1 / 50	~220-240 / 1 / 50
EER / COP	3,35 / 3,66	3,45 / 3,69	3,21 / 4,01	2,67 / 3,61
Energijos efektyvumo klasė šaldant/šildant	A++ / A+	A++ / A+	A++ / A+	A++ / A+
Triukšmo lygis dB (A) Vidinis blokas min.-max. / išorinis blokas	23-29-30,5-34,5 / 54	26-34-38-41 / 56	27-37-40-42 / 60	42-46-48-49,5 / 63
Oro srautas (vid.blokas min.-max.) (m3/min)	5,0-8,0-10,0	12,05-13,98-15,97	13,75-17,25-20,48	25-30-35
Matmenys, mm (WxHxD) vid./išor.	700×450×200 / 765×303×555	880×674×210 / 805×330×554	890×342×673 / 890×342×673	1360×774×249 / 946×410×810
Vid.bloko svoris neto/bruto, kg	17,8 / 21,5	24,4 / 29,6	32,3 / 39,1	40,5 / 48,2
Išor.bloko svoris neto/bruto, kg	26,6 / 29	32,5 / 35,2	43,9 / 46,9	66,9 / 71,5
Vamzdynas	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"	3/8" - 5/8"
Vamzdyno max ilgis/aukštis	25 / 10	30 / 20	50 / 25	75 / 30
Freono R32 kiekis, kg	1,15	1,15	1,50	2,40
El. maitinimas / laido storis	išorinis blokas 3x1,5mm ²	išorinis blokas 3x1,5mm ²	išorinis blokas 3x2,5mm ²	išorinis blokas 3x4,0mm ²
Valdymo laidas tarp bloku	4x1,0	4x1,0	4x1,0	4x1,0
Darbinės temperatūros ribos šaldymas/šildymas*	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24
Mažmeninė kaina EUR be PVM	1 331 €	1 615 €	1 934 €	2 863 €
Mažmeninė kaina EUR su PVM	1 611 €	1 954 €	2 340 €	3 464 €

STANDARD

Available with wired remote controller KJR-120C1



Wired remote controller



Static pressure setting



Standard filter



Operation in low ambient temperatures



Alarm port



Remote switch



Fresh air



"Follow me" function



Optional connection of the condensate drain



Refrigerant leakage detection



Sleep mode



Timer

OPTIONAL



Central controller



Wireless remote controller (RG51A(2)/E)



Economy operation (RG51A(2)/E)



Clean function



LED on/off



WiFi control

Ortakiniai oro kondicionieriai MDV (trifaziai) 2025 m. kainos



Modeliai	DCTB-36R32IVT IN UNVS-36R32INTT OU	DCTB-42R32IVT IN UNVS-42R32INTT OU	DCTB-48R32IVT IN UNVS-48R32INT OU	DCTB-55R32IVT IN UNVS-55R32INT OU
Galia, kW (šald./šild.)	10,55 (2,73~11,78) kW 11,72 (2,78~12,84) kW	12,02 (2,93~12,31) kW 13,48 (3,37~14,07) kW	14,07 (3,52~15,53) kW 16,00 (3,70~18,00) kW	15,24 (4,10~17,29) kW 18,17 (4,40~20,52) kW
Elektros sąnaudos, kW (šald./šild.)	4,00 kW / 3,35 kW	4,30 kW / 3,45 kW	4,30 kW / 3,70 kW	5,00 kW / 5,55 kW
Įtampa, V/Hz	~380-415 / 3 / 50	~380-415 / 3 / 50	~380-415 / 3 / 50	~380-415 / 3 / 50
EER / COP	2,64 / 3,61	2,79 / 3,91	2,93 / 3,76	2,90 / 2,93
Energijos efektyvumo klasė šaldant/šildant	A++ / A+	A++ / A+	A++ / A+	A++ / A+
Triukšmo lygis dB (A) Vidinis blokas min.-max. / išorinis blokas	42,5-46-48-49,5 / 63	43-48-49-51,5 / 63	42-47-49-50 / 64	47-49-52,5 / 64
Oro srautas (vid.blokas min.-max.) (m3/min)	25-30-35	28-34-40	28-34-40	30,3-36,8-43,3
Matmenys, mm (WxHxD) vid./išor.	1360×774×249 / 946×410×810	1200×874×300 / 946×410×810	1200×874×300 / 952×415×1333	1200×874×300 / 952×415×1333
Vid.bloko svoris neto/bruto, kg	40,5 / 48,2	47,6 / 55,8	47,6 / 55,8	47,6 / 55,8
Išor.bloko svoris neto/bruto, kg	80,5 / 85	80,5 / 85	103,7 / 118,3	107 / 121,2
Vamzdynas	3/8" - 5/8"	3/8" - 5/8"	3/8" - 5/8"	3/8" - 5/8"
Vamzdyno max ilgis/aukštis	75 / 30	75 / 30	75 / 30	75 / 30
Freono R32 kiekis, kg	2,40	2,80	2,90	3,00
El. maitinimas / laido storis	išorinis blokas 5x2,5mm2	išorinis blokas 5x2,5mm2	išorinis blokas 5x2,5mm2	išorinis blokas 5x2,5mm2
Valdymo laidas tarp bloku	4x1,0	4x1,0	4x1,0	4x1,0
Darbinės temperatūros ribos šaldymas/šildymas*	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24
Mažmeninė kaina EUR be PVM	2 996 €	3 082 €	3 563 €	3 727 €
Mažmeninė kaina EUR su PVM	3 625 €	3 729 €	4 311 €	4 510 €

STANDARD

Available with wired remote controller KJR-120C1



Wired remote controller



Static pressure setting



Standard filter



Operation in low ambient temperatures



Alarm port



Central controller



Wireless remote controller (RG51A(2)/E)



Economy operation (RG51A(2)/E)



Clean function



LED on/off



Remote switch



Fresh air



"Follow me" function



Optional connection of the condensate drain



Refrigerant leakage detection



WiFi control



Sleep mode



Timer

OPTIONAL




























Grindiniai / lubiniai oro kondicionieriai **MDV** (vienfaziai) 2025 m. kainos



Modeliai	CLFS-18R32IVT IN UNVS-18R32INT OU	CLFB-24R32IVT IN UNVS-24R32INT OU	CLFB-36R32IVT IN UNVS-36R32INTS OU	CLFB-42R32IVT IN UNVS-42R32INTS OU
Galia, kW (šald./šild.)	5,28 (2,71~5,86) kW 5,57 (2,42~6,30) kW	7,03 (3,22~7,77) kW 7,62 (2,72~8,29) kW	10,55 (2,73~11,43) kW 11,72 (2,78~12,78) kW	12,10 (3,20~13,20) kW 13,50 (2,90~14,70) kW
Elektros sąnaudos, kW (šald./šild.)	1,45 kW / 1,50 kW	2,32 kW / 1,90 kW	3,90 kW / 3,35 kW	4,20 kW / 3,70 kW
Įtampa, V/Hz	~220-240 / 1 / 50	~220-240 / 1 / 50	~220-240 / 1 / 50	~220-240 / 1 / 50
EER / COP	3,64 / 3,71	3,12 / 3,72	2,71 / 3,50	3,00 / 3,87
Energijos efektyvumo klasė šaldant/šildant	A++ / A+	A++ / A+	A++ / A+	A++ / A+
Triukšmo lygis dB (A) Vidinis blokas min.-max. / išorinis blokas	24-36,5-41-43,5 / 56	32-43-46-49 / 60	37-44-48,5-50 / 63	39-44,5-47,5-51 / 63
Oro srautas (vid.blokas min.-max.) (m3/min)	12,05-13,98-15,97	14,22-17,05-19,87	25,07-28,8-32,58	25,06-28,8-32,58
Matmenys, mm (WxHxD) vid./išor.	1068x675x235 / 805x330x554	1068x675x235 / 890x342x673	1650x675x235 / 946x410x810	1650x675x235 / 946x410x810
Vid.bloko svoris neto/bruto, kg	28 / 33,3	28 / 33,1	41,5 / 48	41,5 / 48
Išor.bloko svoris neto/bruto, kg	32,5 / 35,2	43,9 / 46,9	66,9 / 71,5	66,9 / 71,5
Vamzdynas	1/4" - 1/2"	3/8" - 5/8"	3/8" - 5/8"	3/8" - 5/8"
Vamzdyno max ilgis/aukštis	30 / 20	50 / 25	75 / 30	75 / 30
Freono R32 kiekis, kg	1,15	1,50	2,40	2,40
El. maitinimas / laido storis	išorinis blokas 3x1,5mm ²	išorinis blokas 3x2,5mm ²	išorinis blokas 3x4,0mm ²	išorinis blokas 3x4,0mm ²
Valdymo laidas tarp bloku	4x1,0	4x1,0	4x1,0	4x1,0
Darbinės temperatūros ribos šaldymas/šildymas*	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24
Mažmeninė kaina EUR be PVM	1 566 €	1 818 €	2 677 €	2 895 €
Mažmeninė kaina EUR su PVM	1 895 €	2 200 €	3 239 €	3 503 €

STANDARD

Available with wireless remote controller RG51A(2)/E

 Wireless remote controller (RG51A(2)/E)	 Hot start	 Alarm port	 Refrigerant leakage detection	 Fresh air	 Clean function	 Timer	 Sleep mode	 Standard filter	 LED on/off
 Restoring the louver settings	 3D airflow	 Horizontal louvers control	 Vertical louvers control	 Operation in low ambient temperatures	 Remote switch	 Optional connection of the condensate drain	 Short cut function	 8°C heating	
 Emergency operation mode	 Auto restart	 Economy operation	 5 steps of fan speed regulation	 TURBO function	OPTIONAL				
	 WiFi control	 Wired remote controller	 Central controller						




























Grindiniai / lubiniai oro kondicionieriai **MDV (trifaziai)** 2025 m. kainos



Modeliai	CLFB-36R32IVT IN UNVS-36R32INTT OU	CLFB-42R32IVT IN UNVS-42R32INTT OU	CLFB-48R32IVT IN UNVS-48R32INT OU	CLFB-55R32IVT IN UNVS-55R32INT OU
Galia, kW (šald./šild.)	10,55 (2,73~11,58) kW 11,70 (2,81~12,78) kW	12,10 (3,20~13,20) kW 13,50 (2,90~14,70) kW	14,07 (3,52~15,24) kW 16,12 (4,10~17,00) kW	15,83 (4,10~16,71) kW 18,17 (4,40~19,964) kW
Elektros sąnaudos, kW (šald./šild.)	4,00 kW / 3,35 kW	4,15 kW / 3,49 kW	4,30 kW / 3,70 kW	5,00 kW / 5,55 kW
Įtampa, V/Hz	~380-415 / 3 / 50	~380-415 / 3 / 50	~380-415 / 3 / 50	~380-415 / 3 / 50
EER / COP	2,64 / 3,50	2,91 / 3,87	2,81 / 3,16	2,80 / 3,00
Energijos efektyvumo klasė šaldant/šildant	A++ / A+	A++ / A+	A++ / A+	A++ / A+
Triukšmo lygis dB (A) Vidinis blokas min.-max. / išorinis blokas	39-44,5-47,5-51 / 63	39-44,5-47,5-51 / 63	36-45-50-53 / 64	38-46,5-50,5-54 / 64
Oro srautas (vid.blokas min.-max.) (m3/min)	25,06-28,8-32,58	25,06-28,8-32,58	26,67-30,83-35	27,5-32,5-36,67
Matmenys, mm (WxHxD) vid./išor.	1650×675×235 / 946×410×810	1650×675×235 / 946×410×810	1650×675×235 / 952×415×1333	1650×675×235 / 952×415×1333
Vid.bloko svoris neto/bruto, kg	41,5 / 48	41,5 / 48	41,7 / 48,5	42,3 / 49,2
Išor.bloko svoris neto/bruto, kg	80,5 / 85	80,5 / 85	103,7 / 118,3	107 / 121,2
Vamzdynas	3/8" - 5/8"	3/8" - 5/8"	3/8" - 5/8"	3/8" - 5/8"
Vamzdyno max ilgis/aukštis	75 / 30	75 / 30	75 / 30	75 / 30
Freono R32 kiekis, kg	2,40	2,80	2,90	3,00
El. maitinimas / laido storis	išorinis blokas 5x2,5mm ²	išorinis blokas 5x2,5mm ²	išorinis blokas 5x2,5mm ²	išorinis blokas 5x2,5mm ²
Valdymo laidas tarp bloku	4x1,0	4x1,0	4x1,0	4x1,0
Darbinės temperatūros ribos šaldymas/šildymas*	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24	-15 - +50 / -20 - +24
Mažmeninė kaina EUR be PVM	2 809 €	2 895 €	3 293 €	3 431 €
Mažmeninė kaina EUR su PVM	3 399 €	3 503 €	3 985 €	4 152 €

STANDARD

Available with wireless remote controller RG51A(2)/E

 Wireless remote controller (RG51A(2)/E)	 Hot start	 Alarm port	 Refrigerant leakage detection	 Fresh air	 Clean function	 Timer	 Sleep mode	 Standard filter	 LED on/off
 Restoring the louver settings	 3D airflow	 Horizontal louvers control	 Vertical louvers control	 Operation in low ambient temperatures	 Remote switch	 Optional connection of the condensate drain	 Short cut function	 8°C heating	
 Emergency operation mode	 Auto restart	 Economy operation	 5 steps of fan speed regulation	 TURBO function	OPTIONAL				
				 WiFi control	 Wired remote controller	 Central controller			